QUALITY FIREPLACES FOR LIFE.

KOZY HEAT FIREPLACES

Bayport 41 Log shown with a Rectangle screen front with an Antique Copper overlay, Masonry refractory and an ember light kit

BAYPORT 41 & BAYPORT 36

DIRECT VENT GAS FIREPLACES

Bayport 41 Log shown with a Prairie screen front and Brick refractory

Bayport 41 Glass shown with a Rectangle Full screen front with a Brushed Nickel overlay, Glacier Crystal glass, Black Enamel refractory and Beach Accent Light kit

Bayport 41 Log shown with an Arched Mission screen front in Weathered Charcoal and Brick refractory

THE BAYPORT 41

The **Bayport** offers a large and impressive viewing area with our most realistic logs and burner system yet. The **Bayport 41** comes in both the Glass and Log version, and the **Bayport 36** comes in three versions, the Log and Glass versions and a millivolt version! With this many options, the **Bayport** provides you the maximum comfort and efficiency available in a gas fireplace. With porcelain reflective panels (standard with the **Bayport 41 Glass** and **Bayport 36 Glass**) create a spectacular view, and combined with a hand-crafted front, make the **Bayport** a perfect choice for a traditional or contemporary design in your home.

Bayport 36 Log shown with a Rectangle screen front in Brushed Stainless, optional Masonry refractory and an ember light kit

Bayport 36 Log shown with an Arch Full Prairie Door screen front, Brick refractory and an ember light kit

THE BAYPORT 36

Ember Light Kit

Bayport 36 Glass shown with a Rectangle Full screen front, Glacier Crystal glass, Black Enamel refractory and a Beach Accent Kit

FIREPLACE OPTIONS

Fronts

Sizes shown below: Bayport 41 / Bayport 36

Rectangle screen front
with optional Enamel refractory

Rectangle Full screen front
optional Beach Accessory Kit
Enamel refractory

Rectangle Full Brushed Stainless screen front
optional Masonry refractory

Rectangle Full screen front with
Brushed Nickel Overlay
Brick refractory

Rectangle Full screen front with
Antique Copper Overlay and Glacier Crystals
Enamel refractory

Prairie screen front
optional Masonry refractory

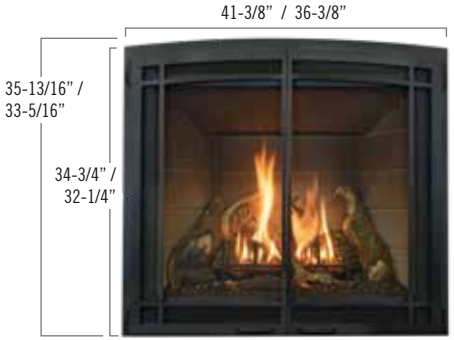

Arched Full Prairie Door screen front
optional Masonry refractory
Black Only

Arched Mission screen front Weathered
Charcoal and Copper Beads
Enamel refractory

Mission screen front Vintage
Bronze and H20 Beads
Enamel refractory

Refractory

Traditional brick

Masonry

Black enamel

Finish Options

Black

Brushed Stainless

Antique Copper

Brushed Nickel

Decorative Finishes

Titanium
Prairie fronts only, excluding Doors

Rust
Prairie fronts only, excluding Doors

Vintage Bronze
Mission fronts only

Weathered Charcoal
Mission fronts only

KOMFORT KONTROL™

The Komfort Kontrol remote gives you the ability to bring comfort and green technology all together into your home. With the Komfort Kontrol remote, all you have to do is decide a comfortable set point temperature on your remote and when the room temperature gets closer to the point you desire, the Komfort Kontrol remote will turn the flames down accordingly! And with our zone heating, you can save energy and enjoy time in the room you use the most by just turning down the central heat, setting your Komfort Kontrol remote, and enjoy your time around the fireplace with friends, family, or just a good book! That way you'll get to have heat where and when you need it while saving energy and money with just a click of the Komfort Kontrol remote!

Remote control features:

- Thermostat function
- Flame height modulation
- Fan speed modulation
- Light kit modulation
- IPI to continuous pilot

Glass Media

Beads

Copper

H2O

Crystals

Glacier

Amber

Black

Seabreeze

Optional Accent Media

Diftwood/Rock

Beach Accent Kit

Ember Light Kit

Bayport 36 Millivolt Option Controls

Thermostat Remote or Deluxe On/Off Remote

Wired or Wireless Wall Mount Thermostat

Wireless wall switch

Burn Videos

Bayport 41 Log

Bayport 41 Glass with Beach Accent Kit

Bayport 36 Enamel Log

Bayport 36 Masonry Log

Bayport 36 Brick Log

Bayport 36 Glass with Beach Accent Kit

SPECIFICATIONS

Fireplace brochures are for advertising purposes only. Refer to the specific fireplace manual for installation.

Model	Bayport 41	Bayport 36
Height	34-1/2”	32”
Width	40-3/4”	35-3/4”
Depth	17”	15”
Weight	200 lbs.	200 lbs.
Viewing Area	34-7/16” X 26-3/8”	29-7/16” X 23-7/8”
NG High / Low	30,000 / 15,000	28,000 / 14,000
LP High / Low	30,000 / 13,500	28,000 / 14,000
ENERGUIDE P.4 NG / LP	76.16% / 76.77%	66.61% / 71.09%
Steady State NG / LP	77.96% / 78.04%	71% / 75%
AFUE % NG / LP	72.19% / 72.16%	70% / 74%
Valve System	IPI	IPI Millivolt (BAY 36-MV)
Black Enamel Refractory	Standard (BAY 41-G) Optional (BAY 41-L, BAY 41-MV)	Standard (BAY 36-G) Optional (BAY 36-L, BAY 36-MV)
Optional Refractory	Brick (BAY 41-L, BAY 41-MV) Masonry (BAY 41-L, BAY 41-MV)	Brick (BAY 36-L, BAY-36-MV) Masonry (BAY 36-L, BAY-36-MV)
Accent Light Kit	Standard (BAY 41-G)	Standard (BAY 36-G)
Ember Light Kit	Optional (BAY 41-L)	Optional (BAY 36-L)
Glass Media	Required (Bay 41-G)	Required (Bay 36-G)
Accent Media	Optional Beach Accent Kit or Driftwood Rock (Bay-41 G)	Optional Beach Accent Kit or Driftwood Rock (Bay 36-G)
Ceramic Glass	Standard	Standard
Fan Kit Availability	Standard (Bay 41-L) Optional (Bay 41-G)	Standard (Bay 36-L) Optional (BAY 36-G, BAY 36-MV)
Finishing Trim Kit	Standard	Standard
Screen Front	Required	Required

Features, Options & Specifications are subject to change.

Clearances

Model	Bayport 41	Bayport 36
Top of unit face to framing	10”	10”
From unit left & right corners	1/4”	1/4”
From unit back	1/2”	1”
Top of finishing edge to ceiling	31”	30”
Side of finishing edge to adjacent sidewall	1”	3/4”
Unit front to combustibles	36”	36”
Unit bottom standoffs to flooring	0”	0”
Mantel depth from unit top*	14” *Mantle 10” deep	13-1/2” *Mantle 9” deep

The Bayport 41 and Bayport 36 models are ordered as either the Log Set model (BAY 41-L or BAY 36-L) or Glass Media model (BAY 41-G or BAY 36-G). Both contain an IPI modulating valve system with full-function remote control. It is also available in a Millivolt (Log Set) model (BAY-36-MV) with a standing pilot system.

Bayport 41

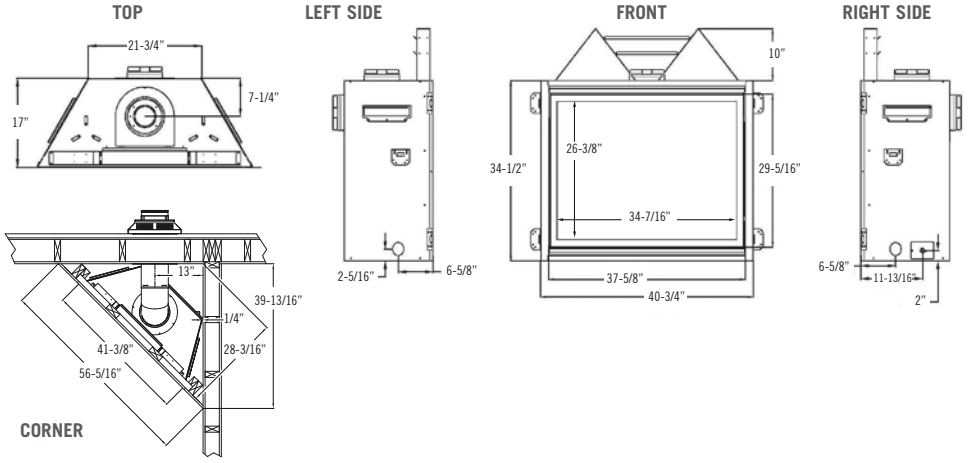

Bayport 36

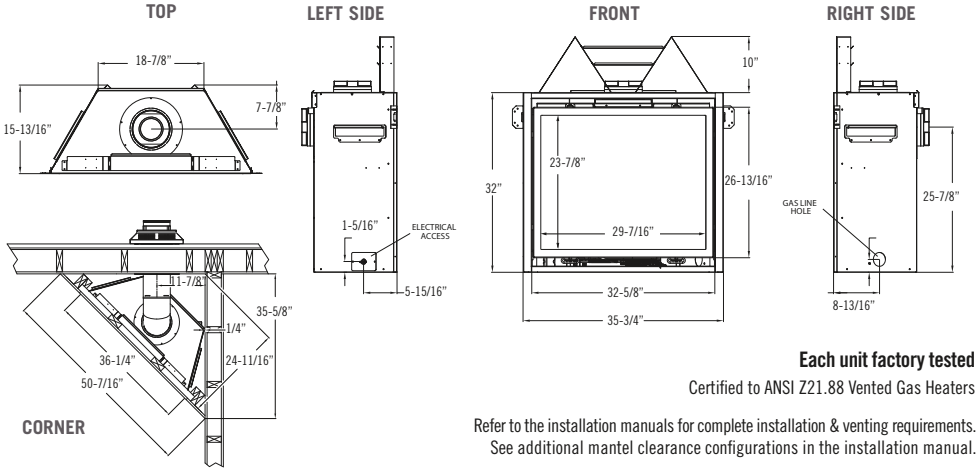

Each unit factory tested
Certified to ANSI Z21.88 Vented Gas Heaters

Refer to the installation manuals for complete installation & venting requirements. See additional mantel clearance configurations in the installation manual.

Note: Over time, antique copper will react with oxygen, heat, and other aspects of the environment and naturally change color, or patina.

Vent System Approval & Requirements

This fireplace is manufactured to accept 4”x 6-5/8” rigid and flexible pipe:

- Simpson Dura-Vent™ DV-PRO Pipe - 4”x 6-5/8”
- Selkirk Metalbestos™ direct chimney system - 4”x 6-5/8”
- Ameri-Vent/American Metal™direct chimney system - 4”x 6-5/8”
- Metal Fab™ 4”x 6-5/8”
- ICC™ 4”x 6-5/8”
- Kozy Heat™ Flexible #700 series vent kits* - 4”x 6-5/8”
- BDM™ direct vent chimney system - 4”x 6-5/8”

IMPORTANT: A wall thimble/pass thru must be used on ALL horizontal vent runs that pass through interior OR exterior walls. (follow vent manufacturers instructions)

The included horizontal vent heat shield must be installed when incorporating minimum horizontal venting. This applies to NG and LP minimum horizontal venting configurations.

Elbows: For each additional 90º elbow used after the first elbow, 3’ must be subtracted from the maximum venting allowed. For each additional 45º elbow used after the first elbow, 1½’ must be subtracted from the maximum venting allowed. Note: (2) 45º elbows = (1) 90º elbow.

Horizontal Terminations
Horizontal Venting Configurations differ between Log and Glass models. Consult their installation manuals for guidance.

Vertical Terminations (Rear Venting)
Minimum: 90º elbow + 3’ + cap
Maximum: 90º elbow + 50’ + cap

Vertical Terminations (Top Venting)
Minimum: 3’ + vent cap
Maximum: 50’ + vent cap

In order to continually provide the highest quality product available, features/options, specifications & dimensions are subject to change. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.**

Product Line:

For complete information on the Kozy Heat product line, please contact us at:

Manufactured by Hussong Mfg. Co., Inc.
204 Industrial Park Drive, Lakefield, MN 56150
Phone 1-800-253-4904 www.kozyheat.com

MADE IN THE U.S.A.