BAYPORT 41 & BAYPORT 36

DIRECT VENT GAS FIREPLACES





Safety Screen Fronts

30-3/8" /

27-7/8"

Sizes shown below: Bayport 41 / Bayport 36

37-9/16" / 32-9/16"



Inside Fit Screen Front with optional Black Glass panels Screen Front available in Black

34-3/4" / 32-1/4"

32-1/4"

34-3/4" /

32-1/4"



Rectangle Full Screen Front with Black Enamel panels Screen Front available in Black, Brushed Stainless

41-3/8" / 36-3/8"



Rectangle Full Screen Front in Brushed Stainless with Black Glass refractory Screen Front available in Antique Copper, Brushed Stainless

41-3/8" / 36-3/8"



Prairie Screen Front with Black Glass refractory Screen Front available in Black

41-3/8" / 36-3/8"



Arched Mission Screen Front in Vintage Bronze with Canyon Creek refractory Screen Front available in Vintage Bronze

41-3/8" / 36-3/8"



Mission Screen Front in Vintage Bronze with Canyon Creek refractory Screen Front available in Vintage Bronze

34-3/4" /

32-1/4"



Media & Refractory/Panel Options



Log Set with Canyon Creek refractory



Crushed Glass with Enamel panels Bayport 36-G Only



Beach Accent Kit (Optional Accent Media with Glass) Bayport 36-G Only



Refractory Options



Canyon Creek



Standard in Bayport 36-G glass model only



Black Glass



Black Brick



Glass Media
Bayport 36-G Only

Crushed Glass







Reflective Copper

Crystals



Glacier



Amber





Burn Videos

Bayport 41 Log



Bayport 36 Black Glass Log



Bayport 36 Brick Log




Bayport 36 Glass with Beach Accent Kit

Black Seabreeze

Specifications

The Bayport is available with traditional or birch log sets, or a contemporary glass media model. These models contain an IPI valve system and full-function remote control. The Bayport 36 & 41 with traditional logs are also available with a millivolt standing pilot system.

Bayport 41

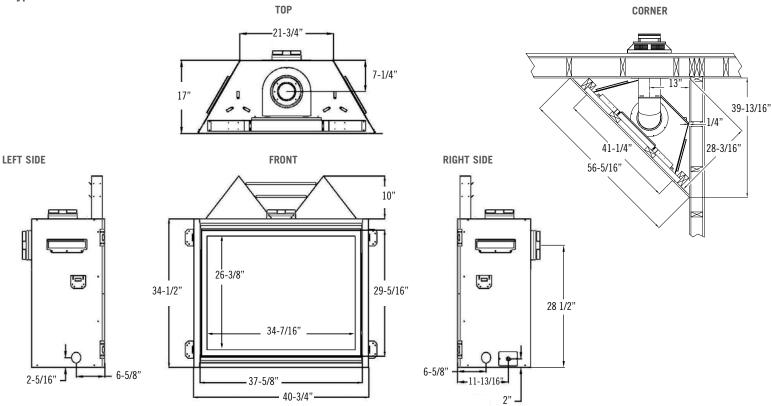

Clearances

Model	Bayport 41	Bayport 36
Mantel 6" deep from appliance top	9"	8"
Mantel 6" deep from appliance top for RSF-2 ONLY	5"	5"
Top of appliance to 3/4" Trim	5-1/2"	4-1/2"
Top of appliance to 3/4" Trim for RSF-2 ONLY	1-1/2"	1-1/2"
From appliance left and right side stand-off	0"	0"
From appliance back stand-offs	0"	0"
From appliance corners	1/4"	1/4"
From appliance front	36"	36"
From appliance top to ceiling:	31"	30"
Appliance sides to adjacent sidewall	1"	3/4"

Model	Bayport 41	Bayport 41 MV	Bayport 36	Bayport 36 MV	
Height	34-1/2"	34-1/2"	32"	32"	
Width	40-3/4"	40-3/4"	35-3/4"	35-3/4"	
Depth	17"	17"	15-13/16"	15-13/16"	
Weight	199 lbs.	199 lbs.	178 lbs.	178 lbs.	
Viewing Area	34-7/16" X 26-3/8"	34-7/16" X 26-3/8"	29-7/16" X 23-7/8"	29-7/16" X 23-7/8"	
BTU NG High / Low	30,000 / 15,000	28,500 / 21,500	26,500 / 14,000	26,500 / 17,500	
BTU LP High / Low	30,000 / 15,000	28,500 / 21,500	26,500 / 14,000	26,500 / 21,000	
ENERGUIDE P.4 NG / LP	76.16% / 76.77%	76.16% / 76.77%	66.61% / 71.09%	65.52% / 70.12% (MV)	
Steady State NG / LP	77.96% / 78.04%	77.96% / 78.04%	71% / 75%	71% / 75%	
AFUE % NG / LP	72.19% / 72.16%	72.19% / 72.16%	70% / 74%	70% / 74%	
Valve System	IPI	Millivolt	IPI	Millivolt	
Black Enamel Panel	N/A	N/A	Standard (BAY 36-G)	N/A	
Optional Refractory/ Panels	Black Glass, Canyon Creek		Black Glass, Canyon Creek		
1 dilcis	(BAY 41-MV, BAY 41-L)		(BAY 36-MV, BAY 36-L)		
Accent Light Kit	N/A	N/A	Standard (BAY 36-G)	N/A	
Ember Light Kit	Standard (BAY 41-L)	N/A	Standard (BAY 36-L)	N/A	
Glass Media	N/A	N/A	Required (BAY 36-G)	N/A	
Accent Media	N/A	N/A	Optional Beach Accent Kit	N/A	
Ceramic Glass	Standard		Standard		
Fan Kit Availability	Standard (BAY 41-L)	Optional	Standard (BAY 36-L) Optional (BAY 36-G)	Optional	
Finishing Trim Kit	Standard		Standard		
Screen Front	Required		Required		


Each unit factory tested

Refer to the installation manuals for complete installation & venting requirements. See additional mantel clearance configurations in the installation manual.

Features, Options & Specifications are subject to change.


Note: Over time, antique copper will react with oxygen, heat, and other aspects of the environment and naturally change color, or patina.

Bayport 36

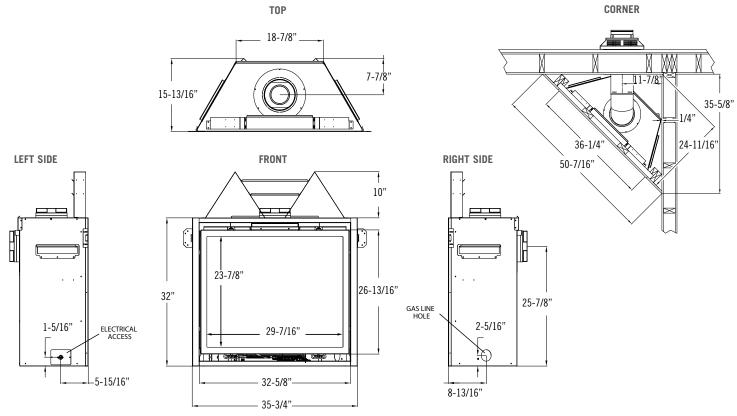


Outdoor Covered Fireplace Install

- Fireplace operation is approved from 40 degrees F to 110 degrees F
 All wiring connections shall be in accordance with outdoor requirements of NECA NFPA 70
- All clearances and requirements in your appliance manual must be adhered to

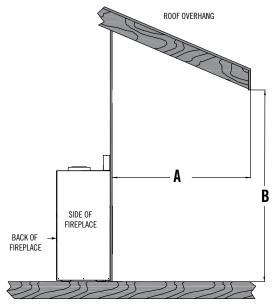

The overhang (A) must be a minimum of 1/2 or greater of the roofline elevation (B) above the base of the fireplace.

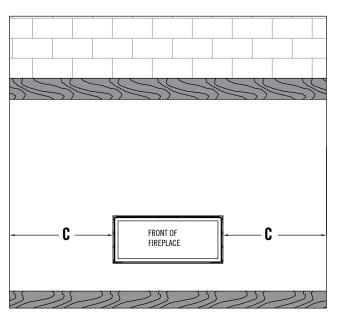

The width of the overhang to each side of the appliance (C) must be a minimum of 1/2 or greater of the roofline elevation (B) above the base of the fireplace.

EXAMPLE: If roofline (B) is 10 ft. above the base of the fireplace, the overhang (A) must be 5 ft. or greater. The width of the overhang to EACH side of the fireplace (C) must be 5 ft. or greater.



Accessories & Controls





The Komfort Kontrol remote gives you the ability to bring comfort and green technology all together into your home. With the Komfort Kontrol remote, all you have to do is decide a comfortable set point temperature on your remote and when the room temperature gets closer to the point you desire, the Komfort Kontrol remote will turn the flames down accordingly! And with our zone heating, you can save energy and enjoy time in the room you use the most by just turning down the central heat, setting your Komfort Kontrol remote, and enjoy your time around the fireplace with friends, family, or just a good book! That way you'll get to have heat where and when you need it while saving energy and money with just a click of the Komfort Kontrol remote!

Remote control features:



Thermostat function



Light kit modulation



Flame height modulation



IPI to continuous pilot



Fan speed modulation

Refer to the specific fireplace manual for installation.

Millivolt Option Controls





On/Off Remote

Thermostat Remote w/ Timer

In order to continually provide the highest quality product available, features/options, specifications, & dimensions are subject to change. Flame appearance and characteristics may be affected by altitude, fuel type, venting configuration, and other factors. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. In some regions it may be possible that this appliance qualifies for an energy rebate. See

Manufactured by Hussong Mfg. Co., Inc. 204 Industrial Park Road, Lakefield, MN 56150 Phone 1-800-253-4904 www.kozyheat.com

your local dealer for details regarding promotions and qualifications











For complete information on the Kozy Heat product line, please contact us at:

FOR CALIFORNIA RESIDENTS ONLY

California Proposition 65 Warning

WARNING: This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel combustion, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.