### QUALITY FIREPLACES FOR LIFE.

0.0

Callaway 50 shown with a Gallery decorative surround, Rock Accent Media Kit with Black Enamel refractory, Reflective Midnight Crushed Glass burner media and a Black Sand perimeter

11 1 Maller



KOZY HEAT

Callaway 50 shown with a Forged decorative surround, Beach Accent Kit, Ledgestone refractory, Lava Rock burner media, and a Vermiculite perimeter

# THE CALLAWAY 50

ai20

Wouldn't it be great to have the freedom of personalizing a fireplace to meet your own unique design inspirations? The **Callaway** linear fireplace offers a multitude of media options and design finishes to enhance any room; from modern to traditional. Our optional *'Komfort Zone'* heat distribution kit allows you to transfer heat into other rooms, or decrease the amount of space needed above the fireplace for a mantle or television. Create the wall that you've been dreaming about and let the **Callaway** transform your room from ordinary to amazing.

5-

# **FIREPLACE OPTIONS & ACCESSORIES**

### **Decorative Surrounds**

### 58-1/4" 56-1/8" 49-7/8" 21-13/16" 13-3/8' 19-1/2" MALLANLL A and A **Rectangle Surround (1 Piece)** No Surround **Rectangle Surround (4 Piece)** Screen Only Available in Black Available in Black, Brushed Stainless 65" 59-3/16" accord Alex 21-1/4" 22-9/16" distill distribution to Julia Gallery Surround Forged Surround Available in Black, Brushed Stainless Available in Vintage Bronze & Weathered Charcoal

### Media & Refractory



Rock Accent Media Kit with Black Enamel refractory, Reflective Midnight Crushed Glass burner media, and a Black Sand perimeter



Beach Accent Kit with Legestone refractory, Lava Rock media, and a Vermiculite perimeter



Traditional Log Set with Chicago Brick refractory, Reflective Copper crushed glass burner media and a Lava Rock perimeter



Traditional Log set with with Black Reflective Glass refractory, Reflective Midnight Crushed Glass Burner Media and Black Glass perimeter

## **Optional Burner Media**



**Reflective Midnight** Crushed Glass



**Reflective Copper Crushed Glass** 



Lava Rock

## **Optional Perimeter Media**





**Reflective Midnight** Crushed Glass

**Reflective Copper** Crushed Glass





Lava Rock

Vermiculite





Black Sand

Black Glass Panel





# **SPECIFICATIONS**

Model	Callaway 50	
Height	39"	
Width	59-1/2"	
Depth	18-15/16"	
Weight	293 lbs	
Viewing Area	49-7/8" x 13-3/8"	
BTU NG High / Low	35,500 / 18,500	
BTU LP High / Low	35,000 / 18,000	
Efficiencies NG / LP	72.59% / 70.45%	
ENERGUIDE P.4	73.49% / 72.74%	
Valve System	IPI	
Optional Media Options	Traditional Logs, Beach Accent Kit, Rock Accent Kit	
Optional Refractory	Enamel Panels, Black Glass, Chicago Brick, Ledgestone	
Ceramic Glass	Standard	
Burner Media (Required)	Reflective Crushed Glass, Lava Rock	
Optional Perimeter Media	Reflective Crushed Glass, Lava Rock, Black Sand, Vermiculite, Enamel Panel, Black Glass Panel	
Komfort Zone Kit	Optional	
Fan Kit	Optional	
Screen Front	Included	


Features, Options & Specifications are subject to change. Clearances

Model	Without Komfort Zone Kit
From appliance top stand-off brackets	3-1/2" / 89mm
From appliance left & right stand-off brackets	0"
From appliance back stand-off brackets	0"
From appliance corners	3" / 76mm
From appliance front	36" / 914mm
Appliance sides to adjacent sidewall	3" / 76mm
Fireplace finishing edge to 3/4" (19mm) trim	18" / 457mm
Mantle 6" (152mm) deep from fireplace finishing edge	21-1/2" / 545mm
Mantle 6" (152mm) deep from fireplace enclosure floor	48" / 1219mm
Minimum height of fireplace enclosure	48" / 1219mm

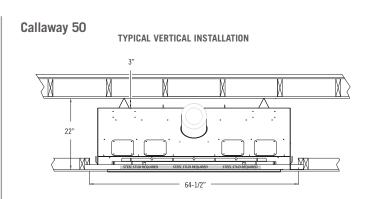



**TYPICAL CORNER INSTALLATION** 

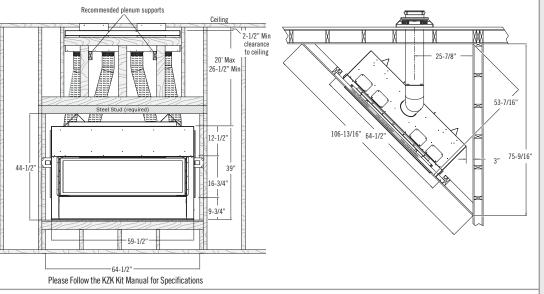

**Burn Videos** 

MADE IN THE U.S.A

 $\mathbf{x}$ 

**Optional Komfort Zone Kit** 





Traditional Log Kit

& venting requirements. See additional mantel clearance Beach Accent Kit configurations in the installation manual.

### FOR CALIFORNIA RESIDENTS ONLY

▲ California Proposition 65 Warning

WARNING: This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel combustion, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.

### **Vent System Approval & Requirements**

This appliance is equipped for use with a 5" exhaust by 8" air intake co-axial vent pipe system. Vent reduction from 5" exhaust to a 4" exhaust may be used for a vertical and horizontal vent runs using the listed reducer from the approved vent manufacture.

### **Horizontal & Vertical Terminations**

- American Metal<sup>™</sup> Products (Ameri-Vent)
- BDM™

Each unit factory tested

Refer to the installation manuals for complete installation

- ICC™
- Metal Fab<sup>™</sup> Olympia Chimney Supply, Inc.
- Security<sup>™</sup>
- Selkirk Metalbestos™
- Simpson Dura-Vent<sup>™</sup> DV-PRO Pipe
- Kozy Heat #800 Series Flexible Direct Vent System (horizontal terminations only)

IMPORTANT: Kozy Heat's #800-WPT series, or a wall thimble products that comply with the required 3" (76mm) top clearance to combustibles, must be installed for all horizontal vent runs that pass through interior or exterior walls. These wall thimble products may be insulated using unfaced insulation products listed as noncombustible per ASTM E 136.

Flame height and appearance will vary depending upon venting configuration and the type of fuel used.

Elbows: For each additional 90° used after the first elbow, 3' must be s subtracted from maximum venting allowed. For each 45° elbow used, 1-1/2' must be subtracted from the maximum venting allowed. (2) 45° may be used in place of (1) 90° elbow.

Horizontal Terminations Minimum:  $45^{\circ}$  elbow + 6" + Termination Cap Maximum:  $45^{\circ}$  elbow +  $24^{"}$  + Termination Cap

Vertical Terminations Minimum: 3' + termination cap Maximum: 50' + termination cap

Horizontal/Vertical Combo: Please refer to the venting chart in the installation manual.

In order to continually provide the highest quality product available, features/options, specifications & dimensions are subject to change. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.

Manufactured by Hussong Mfg. Co., Inc. 204 Industrial Park Drive, Lakefield, MN 56150 Phone 1-800-253-4904 www.kozvheat.com



# product line, please contact us at:

3-19

# Product Line:

Rock Accent Kit

For complete information on the Kozy Heat