

QUALITY FIREPLACES FOR LIFE.

KOZY HEAT FIREPLACES | ROOSEVELT 34 & 29

KOZY HEAT
FIREPLACES



Roosevelt 34 Birch Log shown with Rectangle screen front and a Black Glass panel refractory

ROOSEVELT 34 & 29

TRADITIONAL LOG | BIRCH LOG | BEACH ACCENT KIT
GAS INSERT

Roosevelt 29 Traditional Log shown with Rectangle Screen
Front in Antique Copper, and Herringbone refractory



Roosevelt 29 Beach Accent Kit shown with a Rectangle screen front, and a Black Glass panel refractory



THE ROOSEVELT 34 & ROOSEVELT 29

Old wood burning fireplaces are inefficient and can potentially pose a safety threat to your home, but it is tough to beat the tradition of sitting around a large open fireplace. The **Roosevelt** gas insert series offers a clean face, louverless look that maximizes the viewing area. When combined with our hand-crafted high definition logs and realistic flame, you'll soon forget that old drafty fireplace that you once had. With multiple design options available the **Roosevelt** can be customized to match any décor, and you'll feel good knowing that safety, efficiency, and quality were our top priorities in creating a fire just for your family!



Birch Logs

Roosevelt 29 Birch Log shown with a Forged screen front in Vintage Bronze, and a Chicago Brick refractory





Roosevelt 34 Traditional Log shown with a Prairie screen front, and a Rustic Brick refractory

FIREPLACE OPTIONS

Fronts

Sizes shown below: Roosevelt 34 / Roosevelt 29



Rectangle Screen Front

with a Beach Accent Kit & Black Enamel refractory
Available in Black



Rectangle Copper Screen Front

with a Beach Accent Kit & Black Enamel refractory
Available in Copper



Prairie Screen Front

with Traditional Logs & Herringbone refractory
Available in Black, Rust, Titanium



Arched Prairie Full Door

with Birch Logs & LedgeStone Refractory
Available in Black



Arched Mission Screen Front

with Traditional Logs & Chicago Brick refractory
Available in Vintage Bronze, Weathered Charcoal



Forged Screen Front

with Birch Logs & Rustic Brick refractory
Available in Vintage Bronze, Weathered Charcoal


Refractory Options



Rustic Brick



Chicago Brick



LedgeStone



Herringbone



Enamel Panel



Black Glass Panel




KOMFORT KONTROL

The Komfort Kontrol remote gives you the ability to bring comfort and green technology all together into your home. With the Komfort Kontrol remote, all you have to do is decide a comfortable set point temperature on your remote and when the room temperature gets closer to the point you desire, the Komfort Kontrol remote will turn the flames down accordingly! And with our zone heating, you can save energy and enjoy time in the room you use the most by just turning down the central heat, setting your Komfort Kontrol remote, and enjoy your time around the fireplace with friends, family, or just a good book! That way you'll get to have heat where and when you need it while saving energy and money with just a click of the Komfort Kontrol remote!

Remote control features:

-  Thermostat function
-  Flame height modulation
-  Fan speed modulation
-  Light kit modulation
-  IPI to continuous pilot
-  Split Flow Option

Existing Fireplace Requirements

Roosevelt 34

Existing Fireplace Opening must be at least:

- Height: 23-3/4"
- Front Width: 34-1/8"
- Depth: 16-3/8"
- Back Width: 24-1/8"

Existing Chimney:

Inside Diameter:

- Factory built solid fuel chimney: 7" min
- Masonry Chimney: 6" x 8" min
- Minimum Chimney Height: 10'
- Maximum Chimney Height:
 - Natural Gas: 50'
 - Liquid Propane: 50'

Roosevelt 29

Existing Fireplace Opening must be at least:

- Height: 20"
- Front Width: 29-3/4"
- Depth: 16"
- Back Width: 20-3/8"

Existing Chimney:

Inside Diameter:

- Factory built solid fuel chimney: 7" min
- Masonry Chimney: 6" x 8" min
- Minimum Chimney Height: 10'
- Maximum Chimney Height:
 - Natural Gas: 50'
 - Liquid Propane: 40'

Vent System Approval & Requirements

- Kozy Heat #816 & #816- CAP
- BDM™
- American Metal™ Products (Ameri-Vent)
- Metal Fab™
- Olympia™
- Selkirk Metalbestos™
- ICC™
- Simpson Dura-Vent™

Shroud Dimensions

*Shroud is Required for Installation

Roosevelt 29	Roosevelt 34
25" x 38"	27" x 40"
27-1/2" x 42"	30" x 44"
30" x 44"	33" x 46"

*Custom sizes available when applicable

Media



Traditional Logs



Birch Logs



Beach Accent Kit

Burn Videos



Roosevelt 29
Traditional Logs



Roosevelt 29
Birch Logs



Roosevelt 29
Beach Accent Kit



Roosevelt 34
Traditional Logs



Roosevelt 34
Birch Logs



Roosevelt 34
Beach Accent Kit





SPECIFICATIONS

Fireplace brochures are for advertising purposes only. Refer to the specific fireplace manual for installation.





Model	Roosevelt 34	Roosevelt 29
Height	23-3/4"	19-7/8"
Front Width	33-7/8"	29-5/8"
Back Width	24"	20-1/16"
Depth	16-3/8"	16"
Weight	145 lbs	125 lbs
Viewing Area	28-3/8" x 20"	25-1/8" x 15-1/2"
BTU NG High / Low	40,000 / 10,000	30,000 / 10,000
BTU LP High / Low	40,000 / 10,000	30,000 / 10,000
ENERGUIDE P.4 NG / LP	70.68% / 70.05%	70.09% / 70.42%
STEADY STATE NG / LP	73.63% / 73.45%	74.96% / 75.85%
AFUE% NG / LP	73.05% / 72.81%	74.35% / 68.56%
Valve System	IPI	IPI
Media Options	Traditional Logs, Birch Logs & Beach Accent Kit	Traditional Logs, Birch Logs & Beach Accent Kit
Refractory Options <i>(Required for Installation)</i>	Rustic Brick, Chicago Brick, Ledgestone, Herringbone, Enamel Panels, Black Glass Panels	Rustic Brick, Chicago Brick, Ledgestone, Herringbone, Enamel Panels, Black Glass Panels
Rear Split Flow Burner	Standard	Standard
Ember Bed Light Kit	Standard	Standard
Fan Kit	Standard	Standard
Screen Front	Required	Required

Features, Options & Specifications are subject to change.

Roosevelt 34

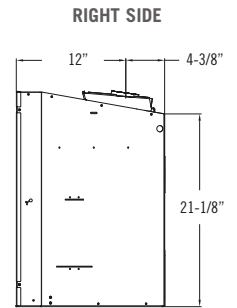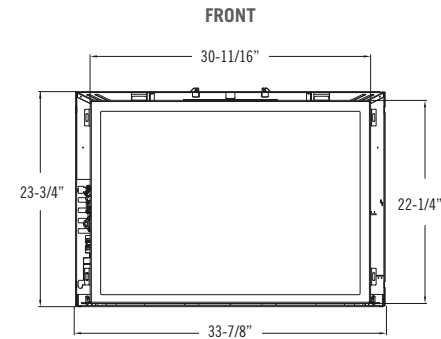
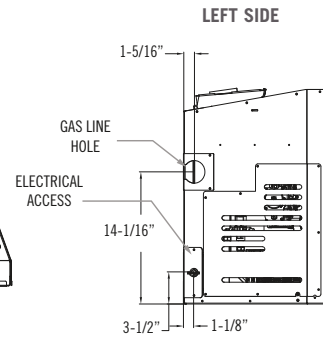
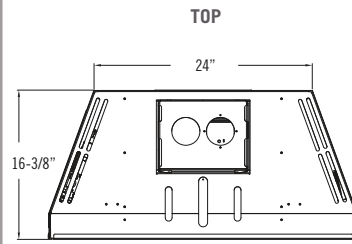


Roosevelt 29

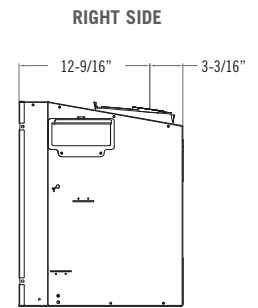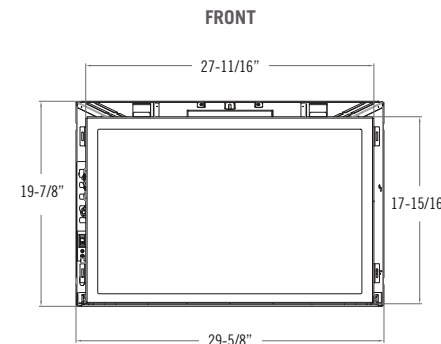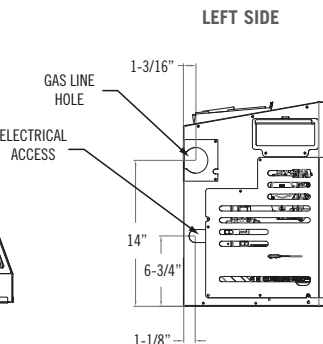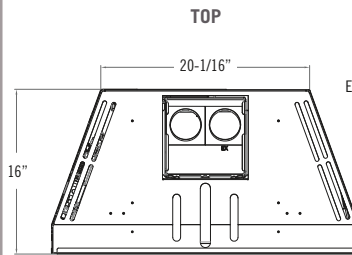

Clearances to Combustibles

For Roosevelt 34 & Roosevelt 29

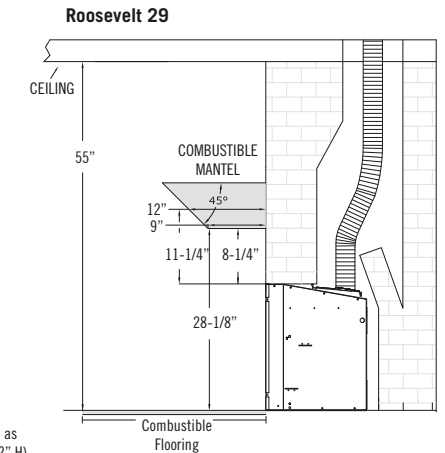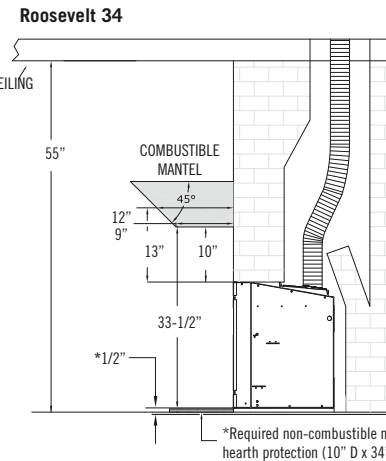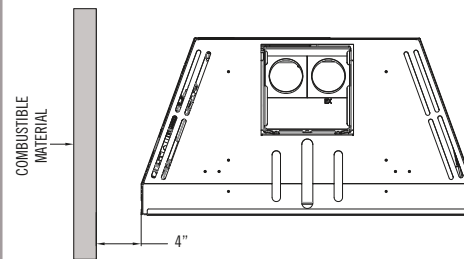

Clearances

Model	Roosevelt 34	Roosevelt 29
From insert to combustible	Refer to the Manual	Refer to the Manual
From insert to combustible side wall	4"	4"
Mantel 9" deep from top of insert	10"	8-1/4"

Each unit factory tested

Refer to the installation manuals for complete installation & venting requirements. See additional mantel clearance configurations in the installation manual.

In order to continually provide the highest quality product available, features/options, specifications & dimensions are subject to change. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.**

Product Line:



For complete information on the Kozy Heat product line, please contact us at:

FOR CALIFORNIA RESIDENTS ONLY

⚠ California Proposition 65 Warning

WARNING: This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel combustion, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.

Manufactured by Hussong Mfg. Co., Inc.
204 Industrial Park Drive, Lakefield, MN 56150
Phone 1-800-253-4904 www.kozyheat.com

6-19

