

CHASKA 34, CHASKA 335S, CHASKA 29, CHASKA 25

GAS INSERTS

Chaska 34 Log with a Rectangle Black screen front, with optional Rustic Brick and a custom 3-sided shroud



QUALITY FIREPLACES FOR LIFE.

KOZY  **HEAT**
FIREPLACES

CHASKA SERIES

Decorative Safety Screen Fronts

Sizes shown below:

Chaska 34 & 335S / Chaska 29 / Chaska 25




Rectangle Screen Front
with optional Black Enamel panels
Screen Front available in Black,
Brushed Stainless



Rectangle Screen Front
In Brushed Nickel Overlay with the Rock Kit
with Black Glass panels
Screen Front available in Antique Copper, Brushed Nickel
(Not available for Chaska 25)



Prairie Screen Front
in Black with optional Rustic Brick refractory
Screen Front available in Black

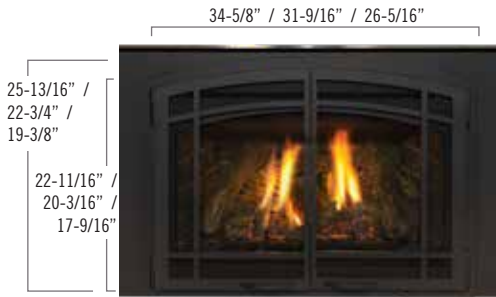

Arched Prairie Full Door Screen Front
with optional Traditional Brick panels
Screen Front available in Black



Arched Prairie Screen Front
With Rock Kit and Black Glass panels
Screen Front available in Black



Arched Screen Front
with optional Black Enamel panels
Screen Front available in Black



Arched Mission Screen Front
in Vintage Bronze with Traditional Brick refractory
Screen Front available in Vintage Bronze



Chaska 29 Log shown with a Rectangle Screen Front with optional Black Glass panels custom 4-sided shroud, and a low mantel kit

CHASKA SERIES






Remote Control Options

Chaska 34, Chaska 29 & Chaska 25 Control



Komfort Kontrol Remote



-  Thermostat function
-  Flame height modulation
-  Fan speed modulation
-  Light kit modulation
-  IPI to continuous pilot

Chaska 29 Millivolt & Chaska 335S Optional Controls



Thermostat Remote or Deluxe On/Off Remote



Wired or Wireless Wall Mount Thermostat



Wireless wall switch

CHASKA SERIES

Media & Refractory Options



Log Set with optional Traditional Brick Refractory



Log Set with optional Rustic Brick Refractory



Crushed Glass with optional Enamel panels*
Enamel panels standard in the Chaska 34 & 29 Glass *Unavailable in the millivolt, rock kit, and Chaska 25 versions.



Rock Kit with Black Glass panels*
*Black Glass panels are available in the Chaska Rock and Log Versions



Driftwood/Rock



Beach Accent Kit

| Model + Media | Refractory Options |
|--------------------------------|--|
| Chaska 34, 29, & 25 LOG | Traditional Brick, Rustic Brick, Black Glass |
| Chaska 34 & 29 ROCK | Black Glass |
| Chaska 34 & 29 GLASS | Enamel |


| Model + Media | Refractory Options |
|---------------|--|
| Chaska 335S | Traditional Brick & Rustic Brick |
| Chaska 25 | Traditional Brick, Rustic Brick, & Black Glass |

Glass Media

Crushed Glass



Reflective Midnight



Reflective Copper

Crystals



Glacier



Amber



Black



Seabreeze



Chaska 29 Glass with a Rectangle Screen Front in Brushed Stainless, Glacier Crystal Glass, optional Beach Accent Kit and a custom 4-sided shroud



Chaska 29 Rock shown with an Arched Mission screen front in Vintage Bronze and Optional Black Glass refractory

Refractory/Panel Options



Traditional Brick



Rustic Brick



Black Glass Panel



Enamel Panel

Burn Videos



Chaska 34 Rock



Chaska 34 Crushed Glass
with a Beach Accent Kit



Chaska 34 Log



Chaska 29 Rock



Chaska 29 Log



Chaska 335S



Chaska 25

CHASKA SERIES

The Chaska 34 (CSK 34-L, CSK 34-G & CSK 34-R), Chaska 29 (CSK 29-L, CSK 29-G & CSK 29-R) and Chaska 25 come standard with an Electronic Ignition Pilot System. The included Komfort Kontrol remote will adjust the flame and fan speed. The Chaska 335S model comes standard with a millivolt operating system and fan kit. The Chaska 29 model offers an optional millivolt operating system and fan kit.

Specifications

| Model | Chaska 34 IPI | Chaska 335S | Chaska 29 Log & Rock | Chaska 29 Glass | Chaska 29 MV | Chaska 25 |
|-----------------------|--------------------------------|---------------------|--------------------------------|--------------------------------|-------------------|--------------------|
| Height | 23" | 23" | 19-1/4" | 19-1/4" | 19-1/4" | 17-1/2" |
| Width | 33-3/8" | 33-3/8" | 29" | 29" | 29" | 25-3/8" |
| Back Width | 24-3/8" | 24-3/8" | 18-7/8" | 18-7/8" | 18-7/8" | 20-3/8" |
| Depth | 16" | 16" | 14-1/2" | 14-1/2" | 14-1/2" | 15" |
| Weight | 150 lbs. | 150 lbs. | 29-L-120 lbs 29-R-121 lbs | 140 lbs | 140 lbs | 107 lbs |
| Viewing Area | 30-1/8" X 17-13/16" | 29-5/8" X 15-13/16" | 26-1/8" X 12-7/8" | 26-1/8" X 12-7/8" | 26-1/8" X 12-7/8" | 22-1/8" X 12-5/16" |
| BTU NG High / Low | 34,000 / 18,500 | 36,000 / 22,000 | 30,500 / 16,000 | 25,500 / 14,000 | 28,500 / 18,500 | 26,000 / 13,500 |
| BTU LP High / Low | 34,000 / 18,500 | 36,500 / 22,000 | 30,000 / 16,000 | 25,500 / 13,500 | 29,000 / 22,000 | 25,500 / 13,000 |
| ENERGUIDE P.4 NG / LP | 73.22% / 76.49% | 65.74% / 66.63% | 72.27% / 72.36% | 60.8% / 63.21% | 71.26% / 71.33% | 71.44% / 72.08% |
| Steady State NG / LP | 77% / 79% | 80% / 75% | 74% / 74% | 72.21% / 72.26% | 74% / 74% | 77.58% / 78.17% |
| AFUE % NG / LP | 75% / 77% | 73.8% / 76.2% | 71% / 72.12% | 66.62% / 66.09% | 71% / 72.12% | 69.79% / 70.33% |
| Valve System | IPI - Standard on all Verisons | Millivolt | IPI - Standard on all Verisons | IPI - Standard on all Verisons | Millivolt | IPI |
| Ember Light Kit | Standard (CSK 34-L, CSK 34-R) | N/A | Standard | N/A | N/A | N/A |
| Accent Light Kit | Standard (CSK 34-G) | N/A | N/A | Standard | N/A | N/A |
| Glass Media | Required (CSK 34-G) | N/A | N/A | Required | N/A | N/A |
| Ceramic Glass | Standard | Standard | Standard | Standard | Standard | Standard |
| Fan Kit Availability | Standard for All Versions | Standard | Standard for All Versions | Standard | Standard | Standard |
| Screen Front | Required | Required | Required | Required | Required | Required |

Features, Options & Specifications are subject to change.

Clearances

| Model | Chaska 34 | Chaska 335S | Chaska 29 Log & Rock | Chaska 29 Glass | Chaska 29 MV | Chaska 25 |
|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| From insert to combustible floor in front | Refer to chart in manual | Refer to chart in manual | Refer to chart in manual | Refer to chart in manual | Refer to chart in manual | Refer to chart in manual |
| From insert to side wall | 6" | 12" | 6" | 6" | 6" | 3" |
| Mantel 9" deep from top of insert* | 16" | 16" | 16" | 16" | 16" | 9" |
| Mantel 9" deep from top of insert with Low Mantel Kit* | 11" | 11" | 11" | 11" | 11" | N/A |

*Low Mantel Kit can attach to any Rectangle Screen Front or (square) Prairie Screen Front to reduce mantel clearances by up to 5"

Refer to the installation manuals for complete installation & venting requirements. See additional mantel clearance configurations in the installation manual.


Note: Over time, antique copper will react with oxygen, heat, and other aspects of the environment and naturally change color, or patina.

Each unit factory tested

Certified to ANSI Z21.88 Vented Gas Heaters


Venting

A gas insert will help in eliminating the heat loss and cold down drafts that you have likely experienced from your existing fireplace and chimney. As the first company to introduce direct-vent technology to gas inserts, Kozy Heat inserts and fireplaces use 100% outside air for combustion. Our inserts and dual 3" aluminum flex venting structure create a sealed system and eliminates the potential of bringing smoke or fumes into the home. When compared to gas logs or "ventless" inserts, this is the safest and most efficient choice that you can make for your family.

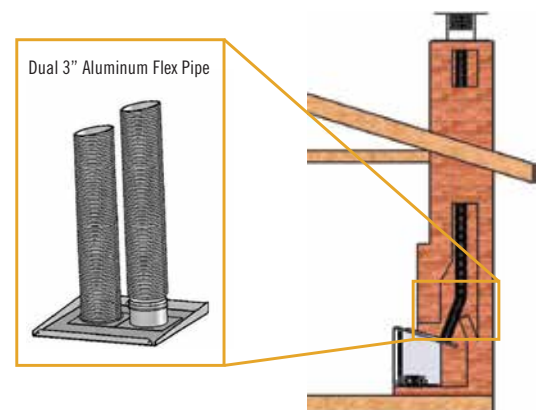


Chaska 34


LEFT SIDE




FRONT



RIGHT SIDE




TOP




Chaska 335S


LEFT SIDE




FRONT

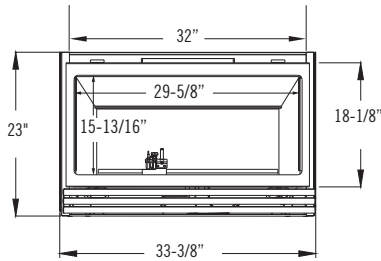

RIGHT SIDE




TOP




Chaska 29


LEFT SIDE




FRONT

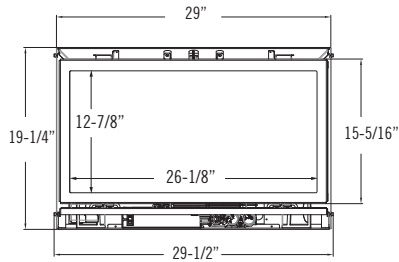

RIGHT SIDE




TOP




Chaska 25


LEFT SIDE




FRONT

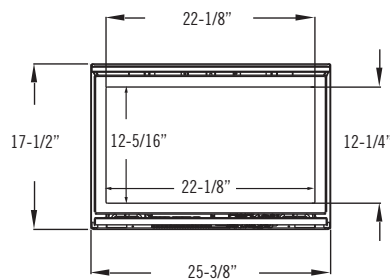

RIGHT SIDE



TOP





Chaska 335S shown with an Arched Prairie Full Door Screen Front and a Traditional Brick refractory

Fireplace brochures are for advertising purposes only. Refer to the specific fireplace manual for installation.

CHASKA SERIES

Existing Fireplace Requirements

Chaska 34 & 335S

Existing Fireplace Opening must be at least:

- Height: 23-1/2"
- Width: 33-1/2"
- Back Width: 24-1/2"
- Depth: 16-3/8" (CSK-34)
- Depth: 16-1/2" (CSK-335S)

Existing Chimney:

Inside Diameter:

- Factory built solid fuel chimney: 7" min.
- Masonry chimney: 6" x 8" min.
- Minimum chimney height: 12'
- Maximum chimney height: 50'

Chaska 29

Existing Fireplace Opening must be at least:

- Height: 19-1/4"
- Width: 29-1/2"
- Back Width: 18-7/8"
- Depth: 15"

Existing Chimney:

Inside Diameter:

- Factory built solid fuel chimney: 7" min.
- Masonry chimney: 6" x 8" min.
- Minimum chimney height: 10'
- Maximum chimney height: 50'

Chaska 25

Existing Fireplace Opening must be at least:

- Height: 17-5/8"
- Front Width: 25-7/8"
- Back Width: 20-5/8"
- Depth: 15-1/4"

Existing Chimney:

Inside Diameter:

- Class 'A' metal: 7" I.D.
- Masonry Chimney: 6" x 8" I.D.
- Minimum chimney height: 10'
- Maximum chimney height: 35'

Vertical Termination ONLY

(Chaska 34, Chaska 335s & Chaska 29)

Minimum vent run: 10'

Maximum vent run: 50'

Vertical Termination ONLY (Chaska 25)

Minimum vent run: 10'

Maximum vent run 35'

Vent System Approval & Requirements

These models are approved for use with the following Vent Systems rigid and flexible pipe:–

- Kozy Heat™ - #816 venting
- Simpson Dura-Vent™
- Selkirk Metalbestos™
- Ameri-Vent™
- ICC™

Shroud Dimensions

*Shroud is Required for Installation

Chaska 34 & 335S

27" x 40"

30" x 44"

33" x 46"

*Custom sizes available where applicable

Chaska 29

25" x 38"

27-1/2" x 42"

30" x 44"

*Custom sizes available where applicable

Chaska 25

22-1/2" x 36"

25" x 38"

30" x 44"

*Custom sizes available where applicable

In order to continually provide the highest quality product available, features/options, specifications & dimensions are subject to change. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.**

Manufactured by Husson Mfg. Co., Inc.
204 Industrial Park Road, Lakefield, MN 56150
Phone 1-800-253-4904 www.kozyheat.com

1-21



Product Line:



For complete information on the Kozy Heat product line, please contact us at:

FOR CALIFORNIA RESIDENTS ONLY

⚠ California Proposition 65 Warning

WARNING: This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel combustion, which is (are) known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.