

GENERATION SERIES

GAS FIREPLACES



KOZY  HEAT
FIREPLACES





THE FIRE

Five ways to burn. Choose what suits the room.

EVERY LOG DESIGNED AND HAND-PAINTED IN OUR OWN SHOP.

BIRCH LOGS | *Designed from real birch, hand-painted in our Lakefield factory. Pale peeling bark and dark knots, true to the tree.*



WEATHERED LOGS | *Cast from real fallen timber, hand-painted in our factory. Silvered gray bark, deep splits, and the worn grain of wood left to the elements.*




GEOMETRIC SPHERES | *Sculptural metal forms in black. Open spheres that frame and catch the flame.*



LAVA ROCK MEDIA | *Black volcanic rock burner bed. Natural broken texture for a darker, more organic register. Pairs with Birch Logs, Weathered Logs,*



ICE GLASS MEDIA | *Crushed clear glass that reflects and refracts the flame into bright, scattered light. A cool, contemporary register. Pairs with Birch Logs, Weathered Logs, Geometric Spheres, or stands on its own.*

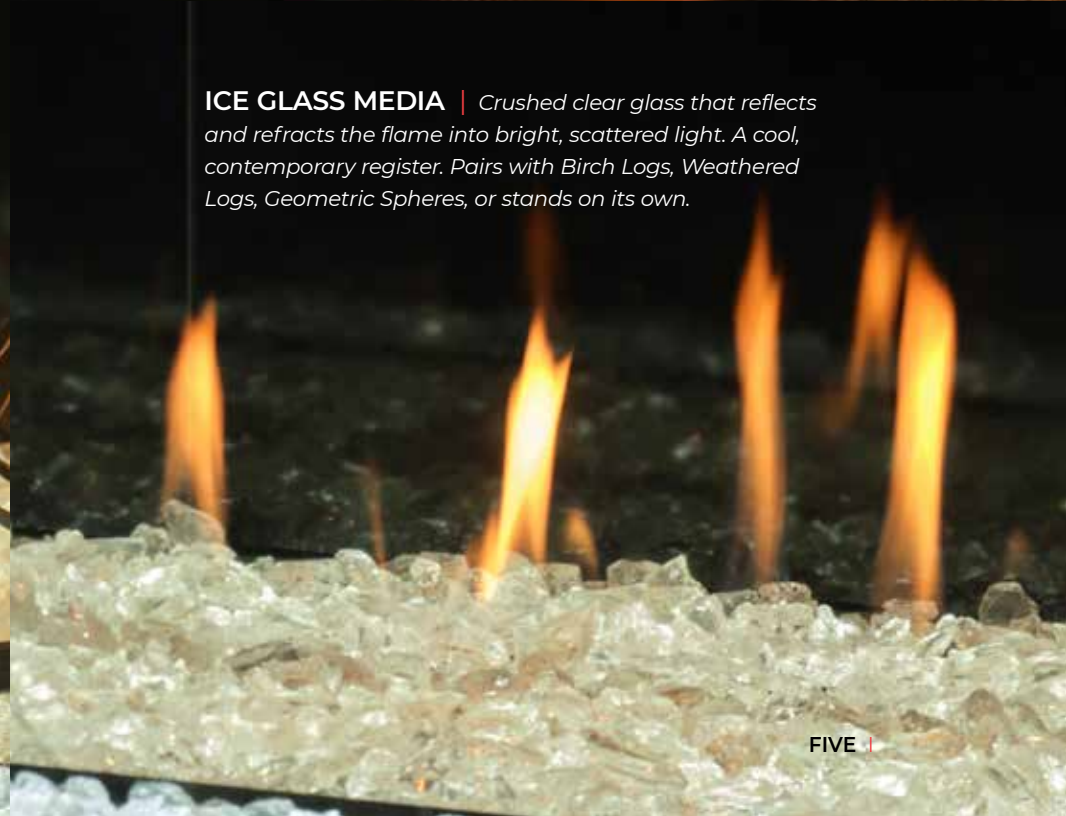

THREE WAYS TO INSTALL

Single-sided, Double-sided, or Bay. Configured to the architecture, not the other way around.

SINGLE-SIDED | Flush install in a flat wall. The fireplace becomes part of an architectural feature wall.



GEN 7220

CORNER | Two-sided viewing tucked into a corner. The front and one side stay open, so the fire turns the corner with the room and stays in view from either approach.



GEN 6020S

BAY | Three-sided viewing. Fire visible from three sides, the most dramatic configuration. The fireplace becomes the architectural pivot of an open plan.

COMPARISONS

SINGLE-SIDED:

1 viewing surface
Flat wall install

CORNER:

2 viewing surfaces
Partial wall install

BAY (THREE-SIDED):

3 viewing surfaces
Bay wall install

SEE THE FIRE IN MOTION

Scan to watch each burner option at full burn.



GEN 6020
Spheres



GEN 6020S
Birch Log



GEN 6020S
Weathered Log



GEN 7220
Birch Log



GEN 7220S
Spheres


GEN 6020 and GEN 7220 models have a Safety Glass barrier; whereas the GEN 6020S and GEN 7220S models have a Safety Screen barrier.

Ice Glass Media is included with 6020 and 7220. Lava Rock or Ice Glass Media required with all units. All log sets and Geometric Spheres are optional add-ons.


DESIGNED TO LIVE WITH

Heat where you want it.


ENGINEERED FOR THE ROOMS ARCHITECTS BUILD. HEAT WHERE YOU WANT IT!

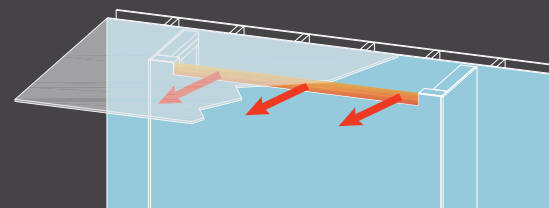

Front Vented Cavity

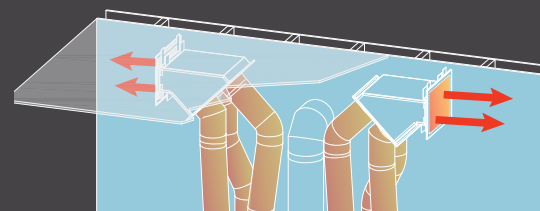

Side Plenum KZK

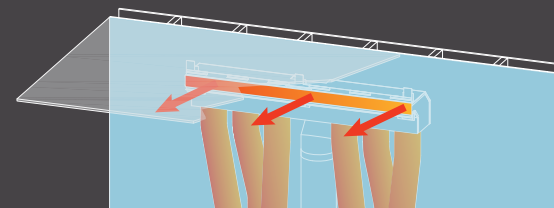


Front Plenum KZK




KOMFORT KONTROL

A single remote brings the fireplace to life. Adjust flame height. Set a thermostat. Move from a quiet evening to a full room of guests with one touch. RGBW LED Controller (6020 and 7220 Model Only).


Every Generation Series fireplace is engineered to direct heat where you want it. Choose from five heat management configurations to suit your room, your venting plan, and your lifestyle.

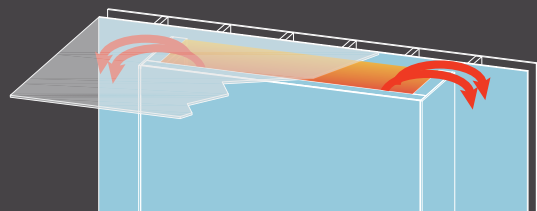

Top Vented Cavity

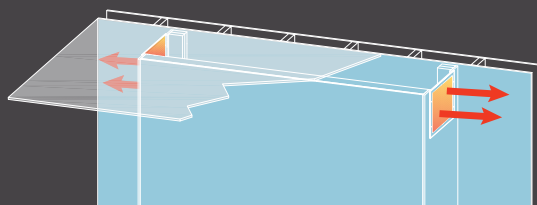

Side Vented Cavity with Grille

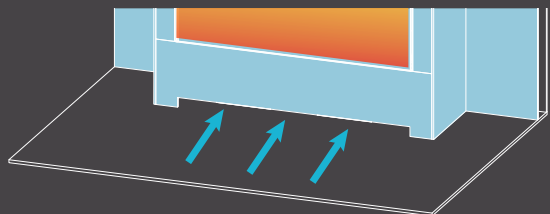

Front Intake | 6020 and 7220 Only







VENTED CAVITY APPLICATION | GEN 6020 installation





FEATURES:

- | Thermostat function
- | Flame height modulation
- | Top light kit modulation
- | IPI to continuous pilot
- | Dimmable and modulating
- | RGBW color wheel
- | Programmable presets
- (6020 and 7220 Model Only)

One heat management option must be selected to cool the firebox chamber. Refer to the owner's manual or contact your dealer for installation detail. Power vent terminations are 4" x 6-5/8" with 1" wall thimble clearance.

SPECIFICATIONS & CLEARANCES

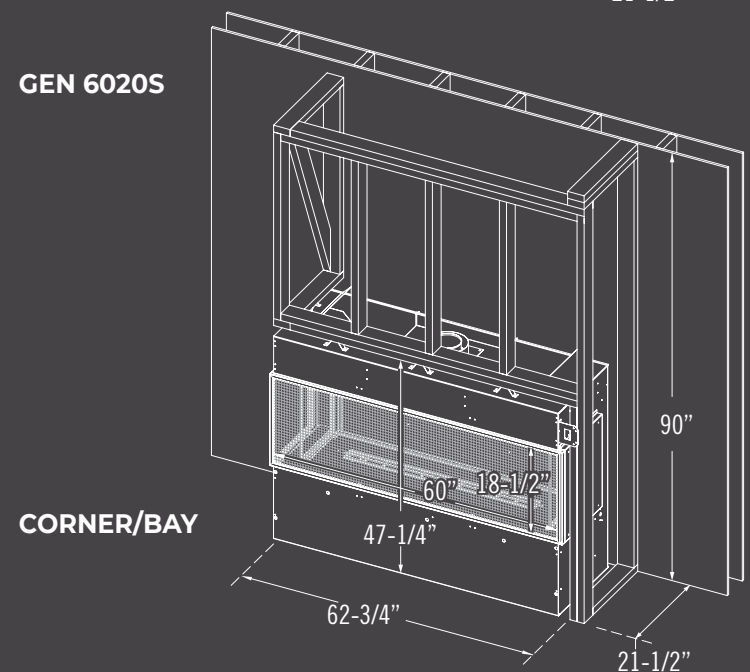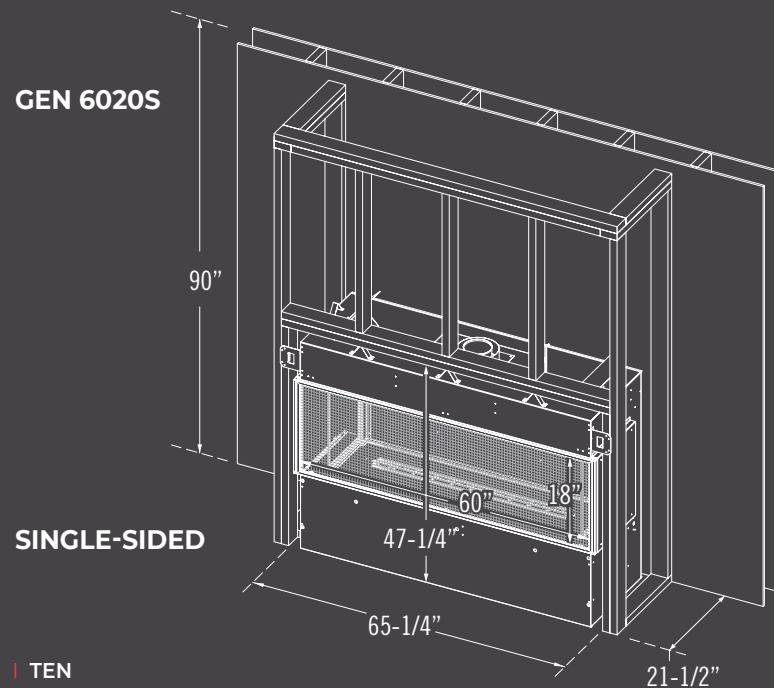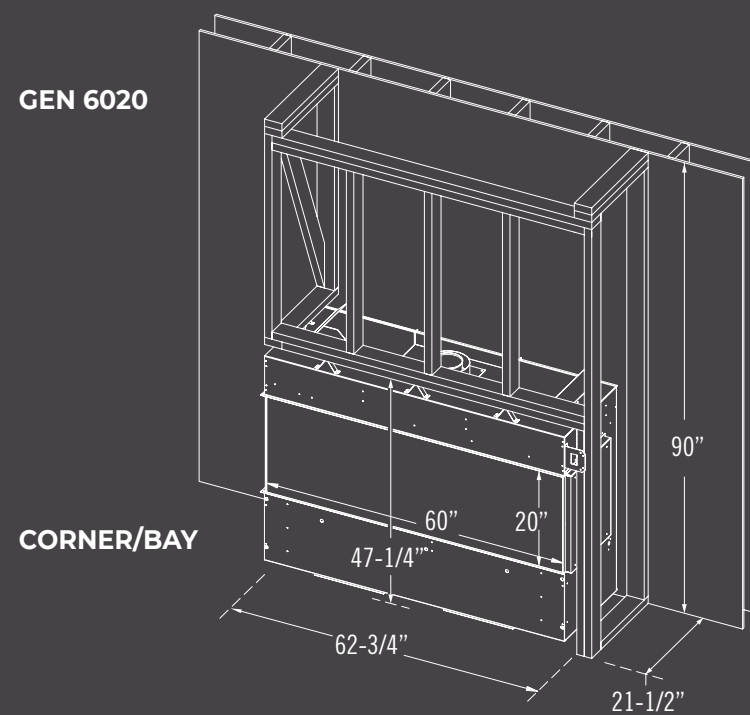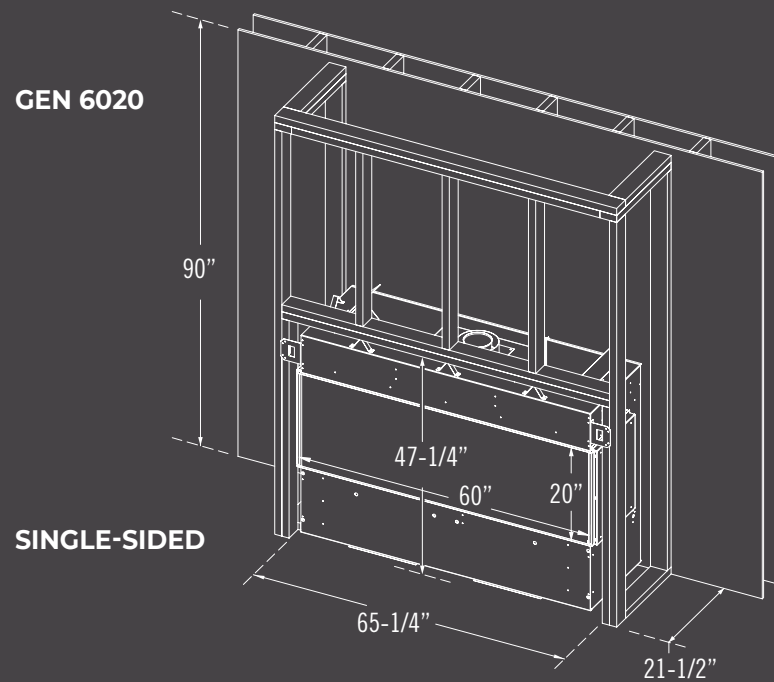

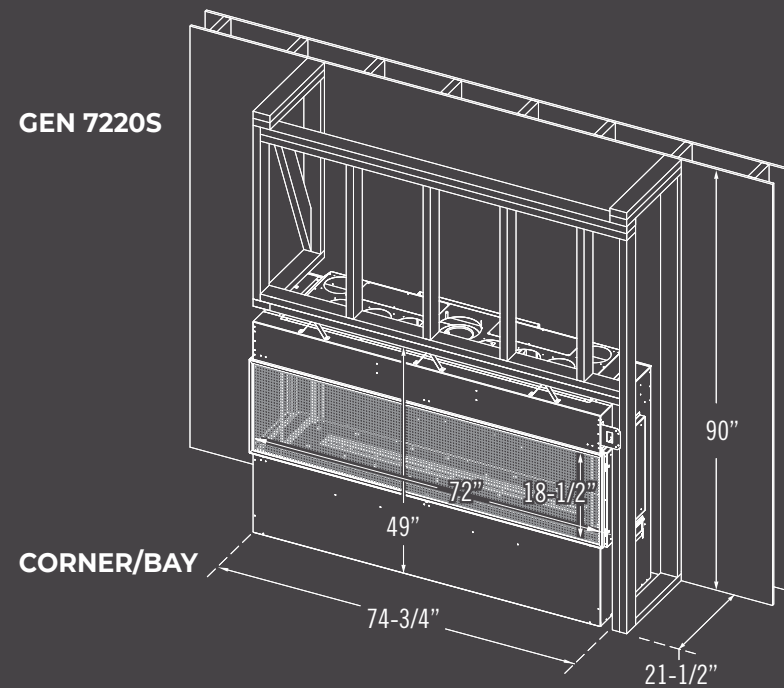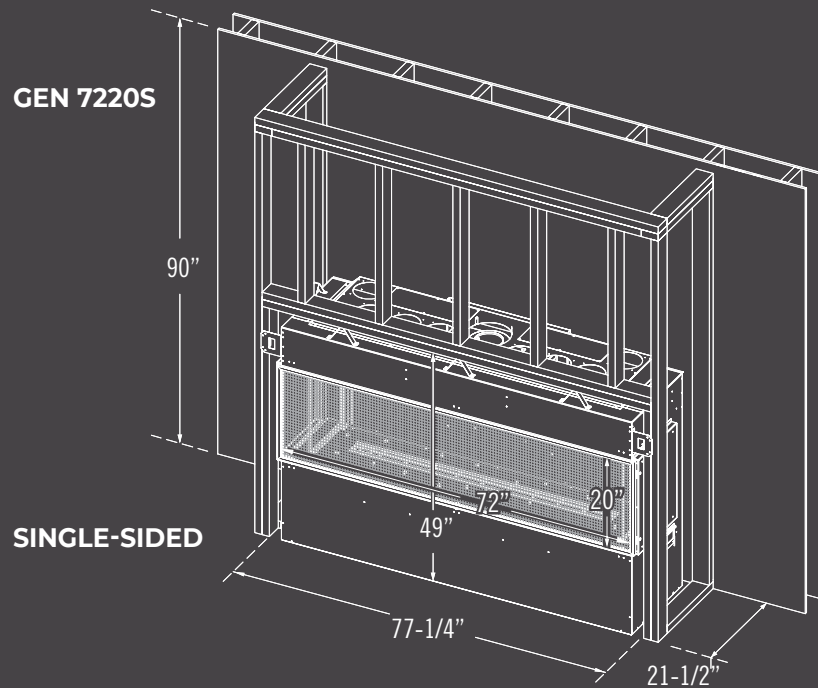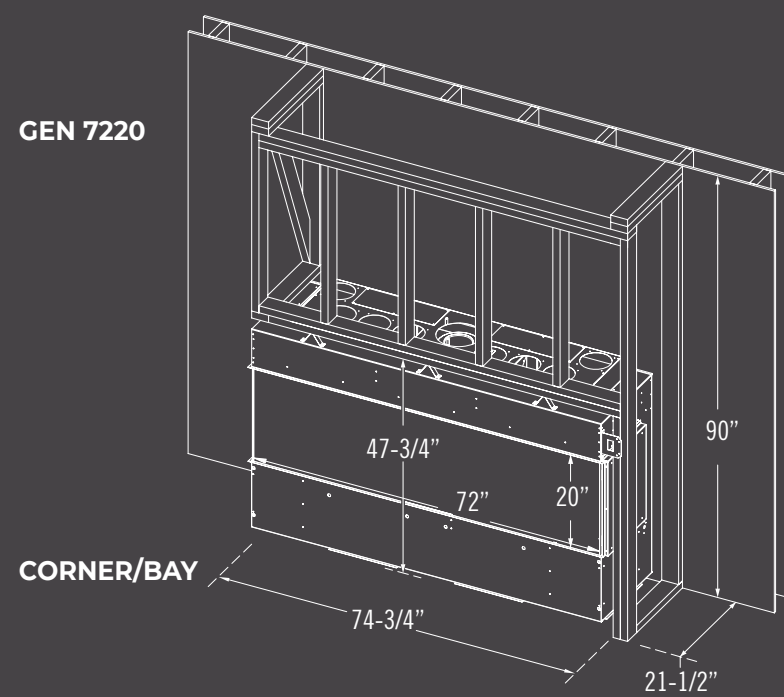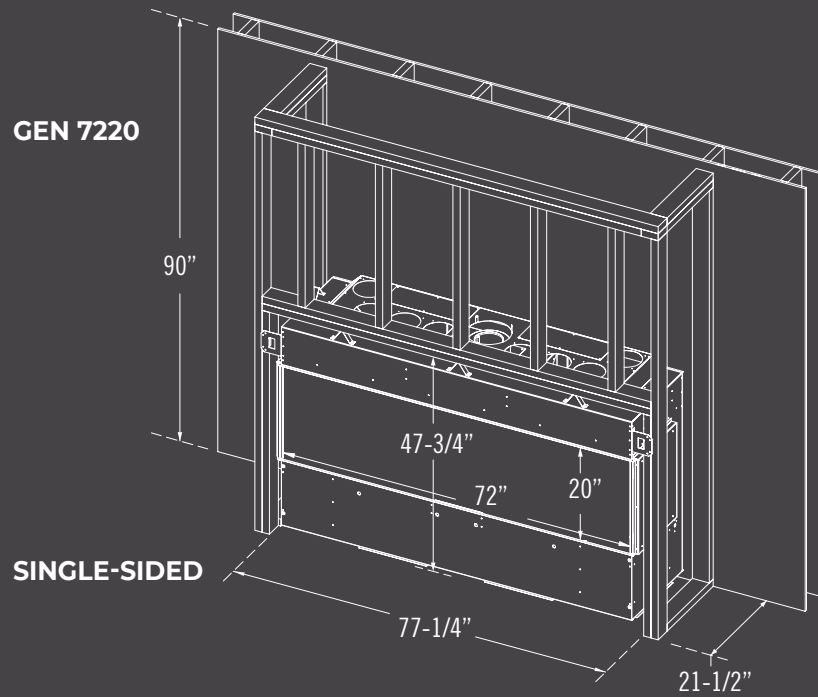

SPECIFICATIONS & CLEARANCES

Four models. One series. Built for the room you are designing.

Model	GEN 6020S / GEN 6020		GEN 7220S / GEN 7220	
DIMENSIONS				
Height	47-1/4"		47-3/4"	
Width	60-1/4"		72-1/4"	
Depth	21-1/2"		21-1/2"	
Weight	435 lbs		535 lbs	
Viewing Area	60" x 18-1/2"	60" x 20"	72" x 18-1/2"	72" x 20"
PERFORMANCE				
BTU/hr NG High / Low	50,000 / 27,000		63,500 / 34,000	
BTU/hr LP High / Low	50,000 / 26,000		62,000 / 31,000	
P.4 NG / LP	71.05% / 71.68%	71.05% / 71.68%	74.06% / 74.53%	74.06% / 74.53%
Steady State NG / LP	70.35% / 70.90%	70.35% / 70.90%	74.65% / 75.26%	74.65% / 75.26%
AFUE NG / LP	71.05% / 72.72%	71.05% / 72.72%	74.80% / 75.38%	74.80% / 75.38%
Valve System	IPI			
FEATURES & OPTIONS				
Media Options	Weathered Log Set, Birch Log Set, Geometric Spheres			
Burner Media (Required)	Lava Rock, or Ice Glass Media	Ice Glass Media Included	Lava Rock, or Ice Glass Media	Ice Glass Media Included
Black Glass Firebox Panels	Optional	Included	Optional	Included
Invisimesh Safety Screen	Required	N/A	Required	N/A
Multi-color LED Lighting	N/A	Included	N/A	Included
Horizontal Power Vent	Optional			
Floor Air Intake	N/A	Required	N/A	Required

CLEARANCES

MINIMUM CLEARANCES TO COMBUSTIBLES

Base to ceiling: 90" (2,286 mm)
 Top / back / nailing flanges: 0"
 Corners: 3" (76 mm)
 Front: 36" (914 mm)
 Side to adjacent wall: 6-1/2"
 Hearth extension: 0"

MANTEL CLEARANCE

GEN 6020 / 7220: 16" projection = 0" clearance
 GEN 6020S / 7220S: 6" projection = 2" (51 mm) clearance

VENT CLEARANCE INSIDE FIREPLACE CHAMBER

Horizontal: top: 6" (76 mm).
 Sides, bottom: 1" (25 mm)
 Vertical: all surfaces: 1" (25 mm)
 Wall Thimble: 5" x 8" = 1/2" | 4" x 6-5/8" Power vent = 1"

Units ship configured for single-sided wall installation. Refer to the Conversion Addendum for double-sided or bay configurations. One heat management option must be selected. Refer to the installation manual for complete installation requirements. Local building codes apply. See Manual for all Clearances.

Certified to ANSI Z21.88 Vented Gas Fireplace Heaters. Each unit factory tested.

In order to continually provide the highest quality product available, features, options, specifications, and dimensions are subject to change. Flame appearance and characteristics may be affected by altitude, fuel type, venting configuration, and other factors. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions this appliance may qualify for an energy rebate. See your local dealer for details.**

Hussong Mfg. Co., Inc. | 204 Industrial Park Road
 Lakefield, MN 56150 800.253.4904 | kozyheat.com



BUILD YOUR FIRE.
 BuildYourFire.com

FOR CALIFORNIA RESIDENTS ONLY

⚠️ California Proposition 65 Warning. This product can expose you to chemicals including carbon monoxide, an externally vented byproduct of fuel combustion, which is known to the State of California to cause birth defects or other reproductive harm. For more information, visit P65Warnings.ca.gov.

